





TECHNICAL INFORMATION - SERIES 859

AVK CONTROL VALVES

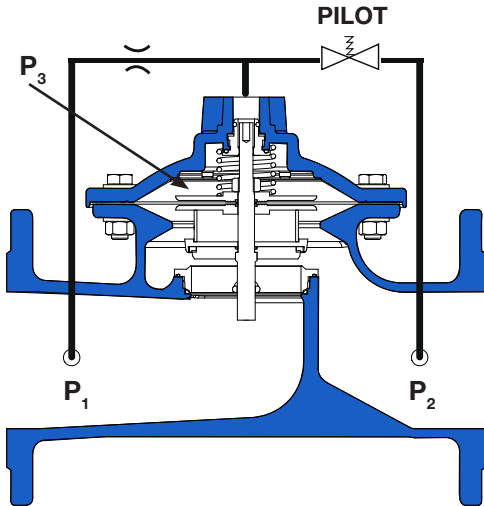


P₁: Inlet pressure/upstream pressure
 P₂: Outlet pressure/downstream pressure
 P₃: Control chamber pressure

Pressure Reducing Valve



Pressure Sustaining Valve



K_v values per DN

Model	DN													
	50	65	80	100	125	150	200	250	300	350	400	450	500	600
Reduced bore (standard)	NA	53	83	119	135	202	435	734	990	1548	2221	2899	3865	4735
Full bore (optional)	44	76	116	175	NA	400	710	947	1355	2174	2734	3757	4548	6539

Formulae (only for water)

K_v: Cubic meters of water, at 18° flowing through the open valve in one hour with a Δp of one bar.
 Q = m³/h P = bar

$$Q = K_v \sqrt{\Delta p} \quad , \quad K_v = \frac{Q}{\sqrt{\Delta p}} \quad , \quad \Delta p = \left(\frac{Q}{K_v} \right)^2$$

HEAD LOSS

Use the formula: $\Delta p = \left(\frac{Q}{K_v} \right)^2$

EXAMPLE: Pressure reducing valve

P1: 8 bar, P2: 3 bar

Flow: MAX – 130 m³/h , MED – 40 m³/hr , MIN – 10 m³/h

$K_v = Q/\sqrt{\Delta P}$

$\Delta P = 5$

$K_v = 130/2.24$

$K_v = 58$

For proportional control valves use a 1.3 safety factor to avoid control failure at momentary high flows.

Safety factor 1.3 x 58 = 75

Valve DN 80 reduced bore

Referring to EN1074-5, the maximum continuous flow speed is 4 m/sec for PN16, and 3 m/sec for PN10.

TECHNICAL INFORMATION - SERIES 859


AVK CONTROL VALVES

Cavitation

Locate inlet and outlet pressure on the cavitation chart. If point location falls in shaded area C or B, continued use of a standard valve can cause deterioration in valve body and produce more noise and vibration.

- AREA A – standard valve
- AREA B – valve with anti-cavitation trim
- AREA C – valves in series

Please consult AVK for special applications.

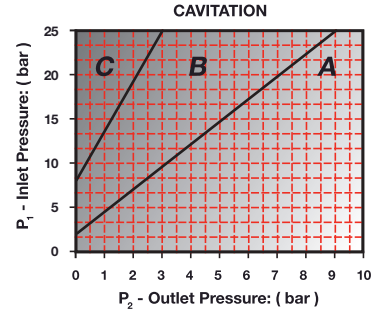


Anti-cavitation trim

To reduce the risk of cavitation, a valve with anti-cavitation trim incorporates a double sliding cage design in stainless steel AISI 316.

The anti-cavitation trim controls the cavitation, protecting the valve and making sure the valve will not suffer from cavitation erosion.

The anti-cavitation trim reduces the flow significantly.

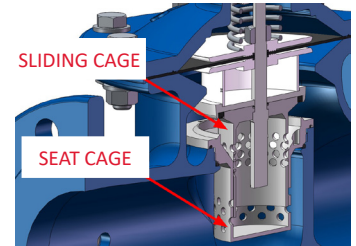

Valves in series

To prevent cavitation problems in applications with a high pressure difference between inlet and outlet, a series of two valves or more can be installed.

